


TECNIS
Odyssey™ IOL
with TECNIS SIMPLICITY™ Delivery System

Model DRN00V



*Image for illustrative purposes only.

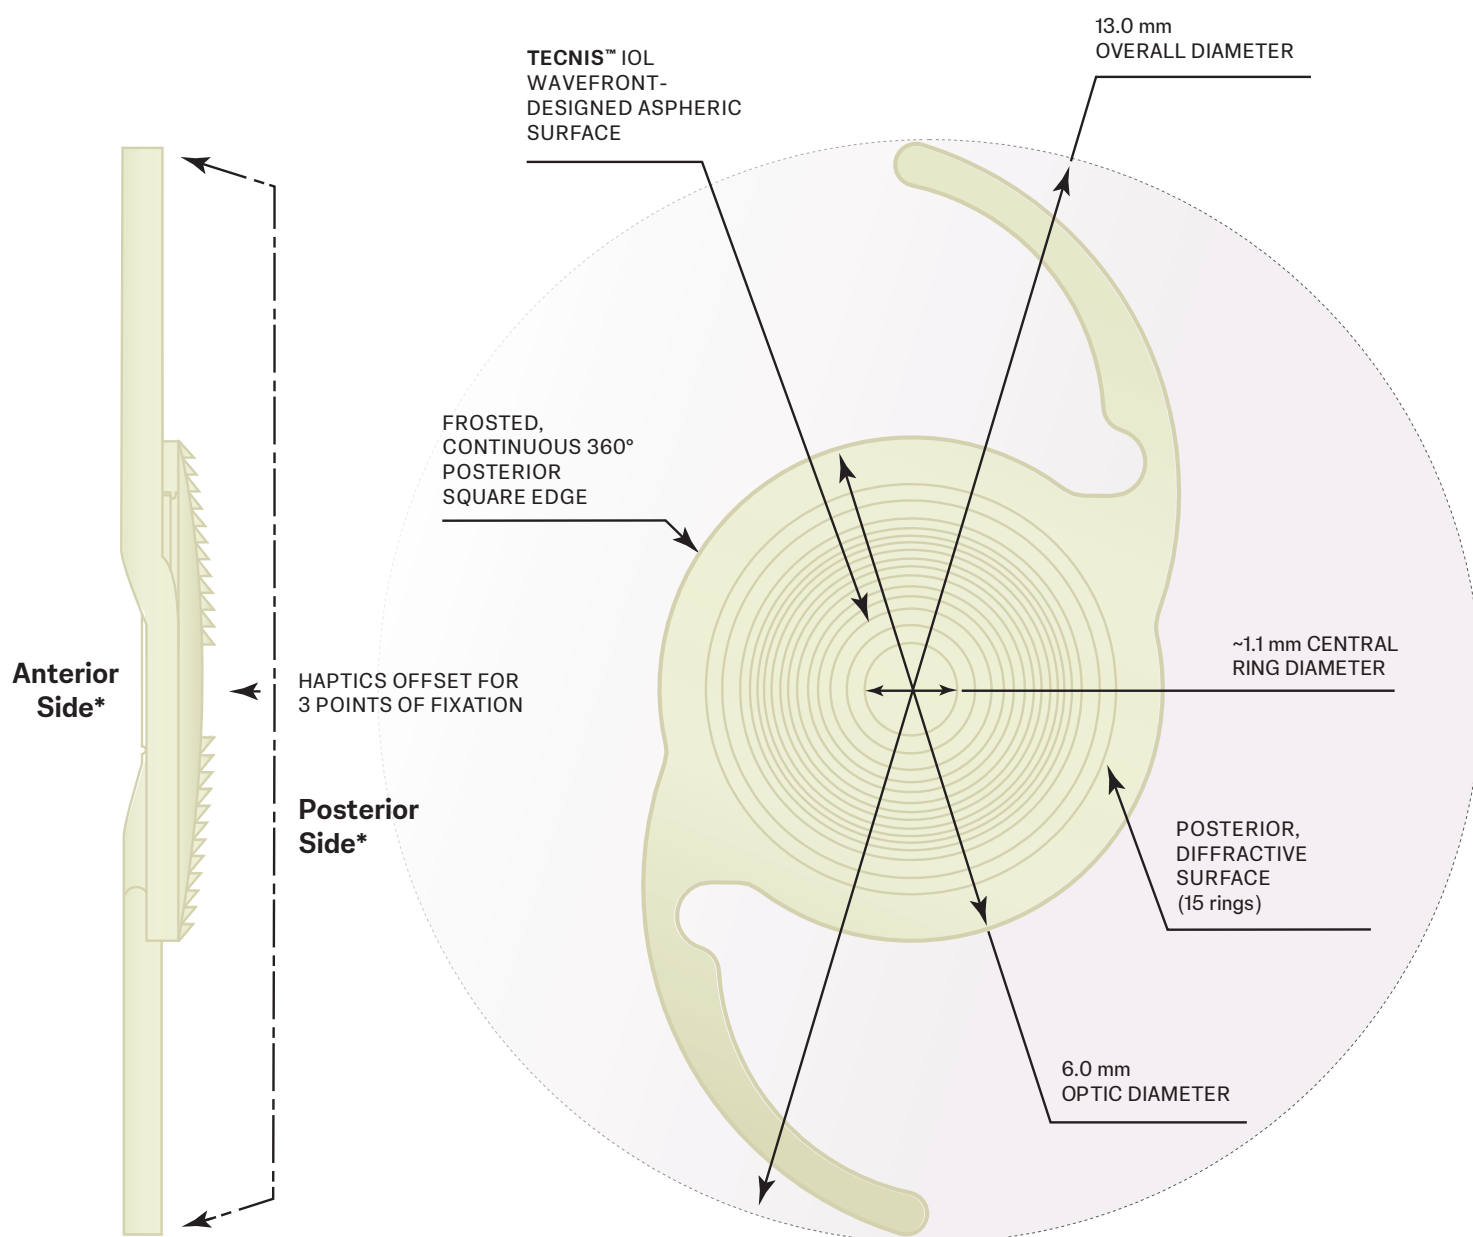

OPTICAL CHARACTERISTICS¹		
Model Number:	DRN00V	
Powers:	+5.0 D to +34.0 D in 0.5 diopter increments	
Diameter:	6.0 mm	
Center Thickness:	0.7 mm (20.0 D)	
Shape:	Biconvex, wavefront-designed anterior aspheric surface, proprietary posterior diffractive surface to provide a full range of vision	
Material:	UV-absorbing hydrophobic acrylic with violet-light filter	
Refractive Index:	1.47 at 35° C	
Edge Design:	ProTEC frosted, continuous 360° posterior square edge	
Achromatic Technology:	Proprietary technology for chromatic aberration correction to enhance contrast	
BIOMETRY¹	CONTACT ULTRASOUND†	OPTICAL††
A-constant:	118.8	119.3
AC Depth:	5.4 mm	5.7 mm
Surgeon Factor:²	1.68 mm	1.96 mm
HAPTIC CHARACTERISTICS¹		
Overall Diameter:	13.0 mm	
Thickness:	0.46 mm	
Style:	C	
Material:	UV-absorbing hydrophobic acrylic with violet-light filter	
Design:	TRI-FIX, Haptics offset from optics; 1-piece lens	
Preloaded TECNIS SIMPLICITY™ Delivery System		

* Values theoretically derived for a typical 20.0 D lens. Johnson & Johnson recommends that surgeons personalize their A-constant based on their surgical techniques and equipment, experience with the lens model and postoperative results.

† IOL constants have been theoretically derived for contact ultrasound.

†† IOL constants have been derived from clinical evaluation results of the TECNIS™ 1-Piece IOL Platform.

References:
1. TECNIS Odyssey™ IOL with TECNIS SIMPLICITY™ Delivery System, Model DRN00V- DFU Z311982E, current revision.
2. Holladay JT. International Intraocular Lens & Implant Registry 2003. *J Cataract Refract Surg.* 2003; 29:176-197. REF2016CT0151.

For healthcare professionals only. Please reference the Instructions for Use for a complete list of Indications and Important Safety Information and contact our specialists in case of any question.

© Johnson & Johnson and its affiliates 2024 | 2024PP13662